

DESCRIPTION



MODEL SHOWN:
ASCO 8210G6



MODEL SHOWN:
ASCO EF8262G148V

MODEL TWO-WAY SOLENOID

- Provides On/Off (Open/Close) control of main valve.
- Interfaces valve operation with timer, relays, probes, etc.
- Manual Override operation available.
- Available in weatherproof or explosion-proof enclosures.
- Wide range of voltages in AC / DC.
- Available energize to open or energize to close.
- Brass or stainless steel bodies available.

The two-way solenoid is a valve that opens and closes flow depending upon the electrical state of the coil. Installed in the valve pilot circuit, it controls the valve to open or close. The solenoid can be installed in series with a hydraulic control pilot to override the pilot and close the valve (e.g., OCV Model 127-80, 108-4), or by itself to make a simple on/off valve, e.g. OCV Model 115-2.

AVAILABLE VOLTAGES

AC, 60Hz.:	24, 120, 240, 480 Volts
AC, 50Hz.:	110, 220, 440, Volts
DC:	6, 12, 24, 125, 240 Volts

ENCLOSURES



General Purpose NEMA 1, 2, 3, 3S, 4, 4X
Explosion Proof NEMA 1, 2, 3, 3S, 4, 4X, 6, 6P, 7, 9

Note:

Specifications stated subject to change depending on solenoid selected per application. Consult factory.
Information Required: Voltage, actuation (energize to open or close), enclosure, working pressure, control fluid, valve function and size.

SCHEMATIC SYMBOL

The two-way solenoid is shown on OCV Valve Schematic as:

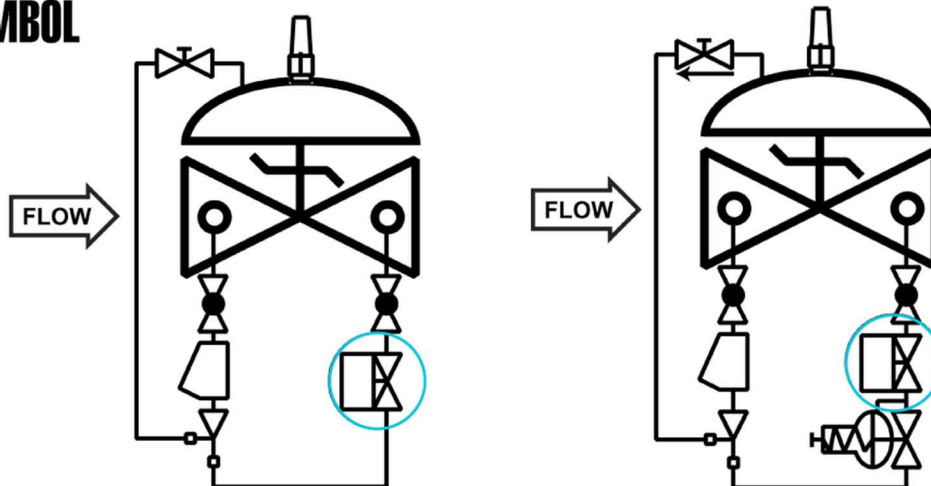

EXAMPLE: Shown here on a: Model 115-2 Solenoid Valve. Model 127-80 Pressure Reducing/Solenoid Valve

TOLL FREE 1.888.628.8258 • phone: (918)627.1942 • fax: (918)622.8916 • 7400 East 42nd Place, Tulsa, OK 74145
email: sales@controlvalves.com • website: www.controlvalves.com