

## Accessories



General representation



Fire Protection

## Pressure Sustaining/Relief 2-Way Pilot Valve

## Description

A 2-Way, diaphragm actuated, spring-loaded, pressure sustaining/relief pilot valve, applicable for service on pressure sustaining/relief valve trims. It modulates to maintain a steady, pre-set pressure, upstream of the valve's location. As upstream pressure rises above the set value, the 68-710 opens to allow water flow between its 4 and 3 ports, relieving the water from the valve's control chamber and causing the valve to open. As upstream pressure falls below the set value, the 68-710 throttles, restricting the flow out of the valve's control chamber, limiting the valve's opening or causing it to close (if necessary).

## Certification &amp; Compliance

UL Listed (when installed on OCV control valves)




## Features &amp; Benefits


- Wide regulation range (can be set up to 33 bar/480psi)
- Large water passages allow high flow capacity and fast reaction
- Accurate and easy to adjust
- Simple design and maximal dependability



Normal pressure



High pressure

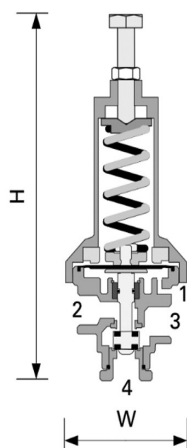

## Operation

General			
Pressure Rating			40 bar / 580psi
Pressure Adjustment Range			0.5 -33 bar / 7-480psi
Fluid Temperature			80°C max / 175°F max
Weight			1.9 kg / 4.2 lbs
Materials	Standard		Optional*
Body & Bonnet	Brass		Stainless Steel
Internal Parts	Stainless Steel & Brass		Stainless Steel
Spring	Stainless Steel		Stainless Steel
Elastomers	EPDM		NBR
Dimensions			
H (Height) max	230 mm / 9"		
W (Width)	84 mm / 3 <sup>3</sup> / <sub>10</sub> "		
Port	Size		Connection
1	1/4" NPT		Upstream
2	1/2" NPT		Plugged
3	1/2" NPT		Control
4	1/2" NPT		Vent
Spring Ranges	Color	psi	bar
47 (Standard)	Green	10-300	0.7-20
42	Yellow	7-150	0.5-10
50	Red	15-480	1-33

\*Other materials available upon request. Minimum quantities may apply.