



# Model RCL 28-2UL



Accessories



General representation



Fire  
Protection

## 2-Way Relay, Manual Reset Latching Device

### Description

A 2-Way, spring-loaded, manual reset latching device, applicable for service on deluge and pre-action valve trims. In its "Ready" position, it prevents draining of the deluge valve's control chamber, keeping the deluge valve closed. Once the deluge valve is actuated, the RCL 28-2UL shifts to its "Latched Open" position, allowing draining of the control chamber and latching open the deluge valve. Manual resetting is accomplished by rotating the RCL 28-2UL's knob.


### Certification & Compliance

UL Listed (when installed on OCV control valves)



### Features & Benefits

- Simple design & maximal dependability
- Extremely large water passages enable fast response
- Tough and durable construction

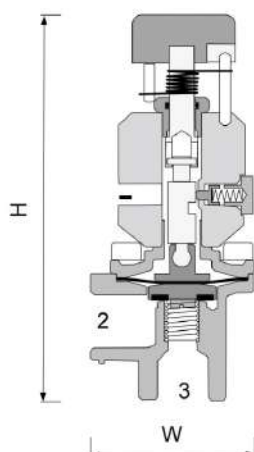

### Operation

General		
Pressure Rating		25 bar / 360psi
Fluid Temperature		80°C max / 175°F max
Weight		1.4 kg / 3.1 lbs
Materials	Standard	
Body	Stainless Steel 316	
Stems	Stainless Steel 316	
Elastomers	EPDM	
Dimensions		
H (Height) max	165 mm / 6 1/2"	
W (Width)	56 mm / 2 1/5"	
Port	Size	Connection
-	1/4" NPT	Pressure Command
2	1/2" NPT	Vent
3	1/2" NPT	Control Chamber

\*Other materials available upon request. Minimum quantities may apply.

Aquestia Ltd. reserves the right to make product changes without prior notice. To ensure receiving updated information on parts specifications, please contact us at [usa@aquestia.com](mailto:usa@aquestia.com). Aquestia Ltd. shall not be held liable for any errors. All rights reserved.

