

RCL 28-2UL

2-Way Relay, Latching Manual Reset Device

A 2-Way, spring-loaded, latching manual reset device, applicable for service on deluge and pre-action valve trims. In its "Ready" position, it prevents draining of the deluge valve's control chamber, keeping the deluge valve closed. Once the deluge valve is actuated, the RCL 28-2UL shifts to its "Latched Open" position, allowing draining of the control chamber and latching open the deluge valve. Manual resetting is accomplished by rotating the RCL 28-2UL's knob.



*General representation

CERTIFICATION & COMPLIANCE

- UL Listed when installed on OCV Fluid Solutions models




FEATURES & BENEFITS

- Simple design & maximal dependability
- Extremely large water passages enable fast response
- Tough and durable construction

TECHNICAL DATA

GENERAL		
Pressure Rating	25 bar / 360psi	
Fluid Temperature	80°C max / 175°F max	
Weight	1.4 kg / 3.1 lbs	
MATERIALS	STANDARD	
Body	Stainless Steel 316	
Stems	Stainless Steel 316	
Elastomers	EPDM	
DIMENSIONS		
H (Height) max	165 mm / 6.5"	
W (Width)	56 mm / 2.20"	
PORT	SIZE	CONNECTION
-	1/4" NPT	Pressure Command
2	1/2" NPT	Vent
3	1/2" NPT	Control Chamber

*Other materials available upon request. Minimum quantities may apply.

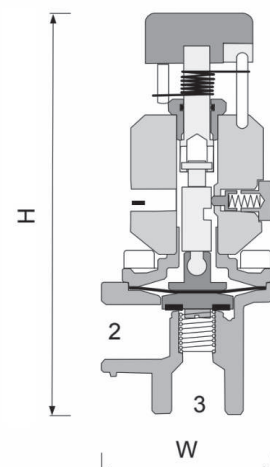

OCV companies worldwide reserve the right to make changes without notice including product specification and configuration, content, description(s), dimensions etc. The information herein is subject to change without notice. OCV shall not be held liable for any errors. All rights reserved. © Copyright by OCV.

7400 East 42nd Place • Tulsa, Oklahoma 74145 • USA
 Phone: 1-918-627-1942 • Toll Free: 1-888-OCV-VALV (628-8258) • Email: sales@controlvalves.com