



▲ Model 108-2HPA

FIRE PUMP RELIEF VALVE

The Model 108-2HP automatically relieves excess fire pump discharge pressure to prevent the pressure from exceeding the rating of the fire system components. It is specifically designed for those systems where the relief set point must be higher than the pressures allowed for UL-listed/FM-approved valves.

SERIES FEATURES

- ▶ Limits maximum pump discharge pressure
- ▶ Opens quickly; maintains pressure within close limits
- ▶ Adjustable 13.7 - 51.0 bar
- ▶ Pilot-operated main valve
- ▶ Pressure setting is adjustable with single screw
- ▶ Factory tested and pre-set to your requirements
- ▶ Sizes 3" (DN80) - 8" (DN200), globe and angle pattern
- ▶ ANSI Flanged Class 300, and 300 inlet x 150 outlet
- ▶ Wide range of materials available

OPERATION


The normally closed, spring loaded pilot, sensing pump discharge pressure, opens when pressure exceeds the spring setting, allowing the main valve to open. As the pump pressure increases, the pilot controls the main valve to open further. Pressure is maintained at the controlled set point over a wide range of flows regardless of back pressure in the downstream piping. The valve closes gradually as pressures decrease below the set point.

COMPONENTS


The Model 108-2HP consists of the following components, arranged as shown on the schematic diagram:

- 1.) **Model 65 Basic Control Valve** (angle pattern shown), a hydraulically-operated, diaphragm-actuated, globe or angle valve which closes with an elastomer-on-metal seal.
- 2.) **Model 2400 Pressure Relief Pilot**, a two-way, normally-closed pilot valve which senses upstream pressure under its diaphragm and balances it against an adjustable spring load. An increase in upstream pressure tends to make the pilot open.
- 3.) **Model 126 Ejector**, a simple "tee" fitting with a fixed orifice in its inlet port that provides the proper pressure to the diaphragm chamber of the main valve depending on the position of the pressure relief pilot.
- 4.) **Model 141-1 Check Valve**, prevents the valve from opening under a vacuum condition that may be encountered with a vertical turbine pump.
- 5.) **Model 159 Y-Strainer**, protects the pilot system from solid contaminants in the line fluid.
- 6.) **Pressure Gauge** (optional)
- 7.) **Model 155 Visual Indicator** (optional), enables user to determine valves' operating position.

SCHEMATIC

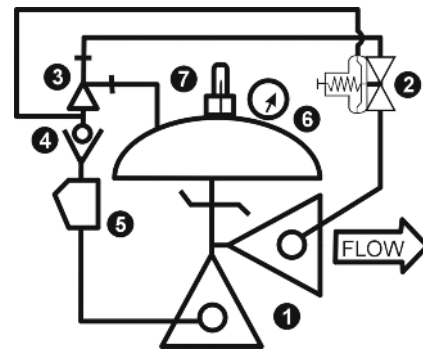

TYPICAL INSTALLATION

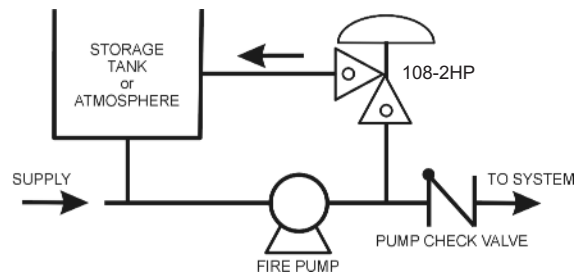

VALVE SIZE	MAX. PUMP FLOW, GPM M ³ /HR	MAX PRESSURE SETTING, BAR
3" (DN80)	114	44.1 (Ductile Iron) 51.0 (Steel/Stainless Steel) 34.4 (Bronze)
4" (DN100)	227	44.1 (Ductile Iron) 51.0 (Steel/Stainless Steel) 34.4 (Bronze)
6" (DN150)	568	44.1 (Ductile Iron) 51.0 (Steel/Stainless Steel) 34.4 (Bronze)
8" (DN200)	1136	44.1 (Ductile Iron) 51.0 (Steel/Stainless Steel) 34.4 (Bronze)

SIZING

Fire pump relief valves are sized per the guidelines in NFPA 20, and are based on the rated flow of the pump.

TOLL FREE 1.888.628.8258 • phone: (918)627.1942 • fax: (918)622.8916 • 7400 East 42nd Place, Tulsa, Ok 74145
 email: sales@controlvalves.com • website: www.controlvalves.com

Model 108-2HP (Globe) / 108-2HPA (Angle)



SIZES

GLOBE - 3" (DN80), 4" (DN100), 6" (DN150), 8" (DN200)
 ANGLE - 3" (DN80), 4" (DN100), 6" (DN150), 8" (DN200)

SPRING RANGES

13.7 - 51.0 bar

FLUID OPERATING TEMPERATURE RANGE

Buna-N 32°F to 180°F*
 EPDM 32°F to 230°F*

MATERIALS

(Consult factory for others)

Body/Bonnet:

- Ductile Iron - epoxy coated (standard)
- Cast Steel - epoxy coated
- Stainless Steel
- Nickel-aluminum Bronze

Seat Ring:

- Bronze (standard)
- Stainless Steel (optional)
- Nickel-aluminum Bronze (optional)

Stem:

- Stainless Steel (standard)
- Monel (optional)

Spring:

- Stainless Steel

Diaphragm:

- Nylon Reinforced Buna-N*
- EPDM*

Seat Disc:

- Buna-N*
- EPDM*

Pilot:

- Stainless Steel
- Tubing/Fittings- Stainless Steel

*Others available upon request

SPECIFICATIONS

The fire pump relief valve shall function to limit pump discharge pressure.

DESIGN

The valve shall be a single-seated, line pressure operated, diaphragm actuated, pilot controlled globe or angle valve. The valve shall seal by means of a corrosion-resistant seat and resilient, rectangular seat disc. These and other parts shall be replaceable without removing the valve from the line. The stem of the main valve shall be guided top and bottom by integral bushings. Alignment of the body, bonnet and diaphragm assembly shall be by precision dowel pins. The diaphragm shall not be used as a seating surface, nor shall pistons be used as an operating means. The pilot system shall be furnished complete and installed on the main valve, and shall include a Y-strainer. The valve shall be operationally and hydrostatically tested prior to shipment.

MATERIALS OF CONSTRUCTION

The main valve body and bonnet shall be ductile iron. All internal ferrous surfaces shall be coated with 4 mils of epoxy. External surfaces shall be coated with 4 mils of epoxy followed by a coat of fire red enamel paint. The main valve seat ring shall be bronze. Elastomers (diaphragms, resilient seats, and O-rings) shall be Buna-N. Control pilot shall be stainless steel. The control line tubing shall be stainless steel.

ACCEPTABLE PRODUCTS

The fire pump relief valve shall be a Model 108-2HP (globe) or 108-2HPA (angle), sized per NFPA 20 and as manufactured by OCV Control Valves, Tulsa, OK, USA.

U.S. DIMENSIONS (INCHES)

DIM	FLANGES	3	4	6	8
A	300#	12 3/4	15 5/8	18 5/8	26 3/8
	300#X150#	12 3/4	15 5/8	18 5/8	26 3/8
C	300#	6 3/8	7 13/16	10 1/2	13 3/16
	300#X150#	6 3/8	7 13/16	10	12 11/16
D	300#	4 3/8	5 13/16	6 1/2	8 1/2
	300#X150#	4 3/8	5 13/16	6 1/2	8 1/2
E	ALL	6 1/2	8	10	11 7/8
F	ALL	3 7/8	3 7/8	3 7/8	6 3/8
H	ALL	11	12	13	14

METRIC DIMENSIONS (MILLIMETERS)

DIM	FLANGES	DN80	DN100	DN150	DN200
A	300#	324	397	473	670
	300#X150#	324	397	473	670
C	300#	162	198	267	335
	300#X150#	162	198	254	322
D	300#	111	148	165	216
	300#X150#	111	148	165	216
E	ALL	165	203	254	302
F	ALL	98	98	98	162
H	ALL	279	305	330	356


For maximum efficiency, the OCV control valve should be mounted in a piping system so that the valve bonnet (cover) is in the top position. Other positions are acceptable but may not allow the valve to function to its fullest and safest potential. In particular, please consult the factory before installing 8" (DN200) and larger valves, or any valves with a limit switch, in positions other than described. Space should be taken into consideration when mounting valves and their pilot systems.

A routine inspection & maintenance program should be established and conducted yearly by a qualified technician. Consult our factory @ 1-888-628-8258 for parts and service.

How to order your 108-2HP valve

When Ordering please provide:

- Series Number - Valve size - Globe or Angle - Pressure Class - Flanged - Trim Material - Adjustment Range - Pilot Options - Special needs / or Installation Requirements

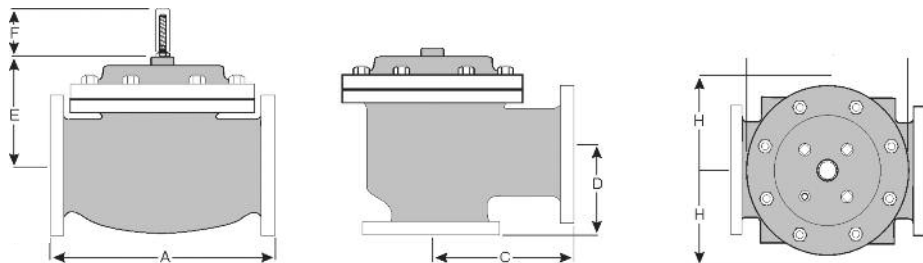

QUALITY SYSTEM
 REGISTERED TO
 ISO 9001

Represented by:

TOLL FREE 1.888.628.8258 • phone: (918)627.1942 • fax: (918)622.8916 • 7400 East 42nd Place, Tulsa, Oklahoma 74145
 email: sales@controlvalves.com • website: www.controlvalves.com